The photo may show the standard model and not the configurated one

Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
UP-651 230V 1N 50HZ

19089737 16/04/2025

DENOMINATION:

Professional refrigerated cabinet with 3 (GN+2/1)+1 shelves.

DESCRIPTION :

- Exterior finishing: White coated galvanized steel.
- Removable pull-out/push-in magnetic door gasket to keep maximum hygiene and maintain the insulating properties
- Hinged doors with automatic return for a perfect closing that minimize temperature gain. Doors have a 120° dwell position and close automatically at less than 90°.
- CFC-free, high-density (40 kg/m³) polyurethane insulation, injected under high pressure.
- Rounded edge interiors, for easier cleaning operations to reduce potential dirt traps with a built-in drainage to get rid of waste liquid inside units.
- Intuitive, digital display for electronic control with energy saving function to ensure an optimal control of storing products.
- ON/OFF power switch.
- Door designed for easy opening orientation modification.
- Interior construced with white coated galvanized steel.
- Doors with ergonomic, full-length, robust, perfectly integrated handle that ensures practical opening and avoids dust and dirt collection.
- Internally designed static cooling system. Interior shelves built-in epoxy coated copper pipes, acts as an evaporator to cool down the products.
- Ice defrosting process needs to be done manually.
- 400 and 600 models with 7 levels of grills and 235mm distance among them.
- 200 models with 3 levels and 200mm distance among them.

POSSIBLE OPTIONS :

- 60 Hz
- Wheels Kit (Factory Assembly)

POSSIBLE ACCESSORIES :

- ACCESSORIES FOR REFRIGERATION

SUPPLIED ACCESSORIES:

- 19106515 Epoxi grid 651x510 for UP-651 professional cabinets. 3
- 19106516 Epoxi grid 651x380 for UP-651 professional cabinets. 1

DIMENSIONS



X Width	780 mm	X Gross width	820 mm
Y Depth	740 mm	Y Gross depth	780 mm
Z Height	1865 mm	Z Gross height	2010 mm
Net Weight	80,0 kg	Gross Weight	93,0 kg
Net volume	1,076 m3	Gross volume	1,286 m3

ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	0,186 kW
Voltage	230V
Phases	1N
Electric frequency	50Hz
Amperage (A)	1.3A

COLD TECHNICAL SPECIFICATIONS

Termperature	0 +8 ºC
Climate class	4
Refrigeration power	0,292 kW
Gas type	R-600a
GWP	3
Cooling gas load	0,082 kg
Gross internal volume	600 L
Noise level	43,00 dB
Condensation system	Static
Model Type	Vertical cabinet
Annual elec. consumption	954,00 kWh
Power consumption 24h	2,61 kWh
Refrigeration net.vol	511 L
IEE	66
Clasif. Energy efficiency	D

CONNECTIONS TECHNICAL SPECIFICATIONS

Single-phase 230V wiring	2X1,5+T - 6 A

Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
UP-651 230V 1N 50HZ

19089737 16/04/2025

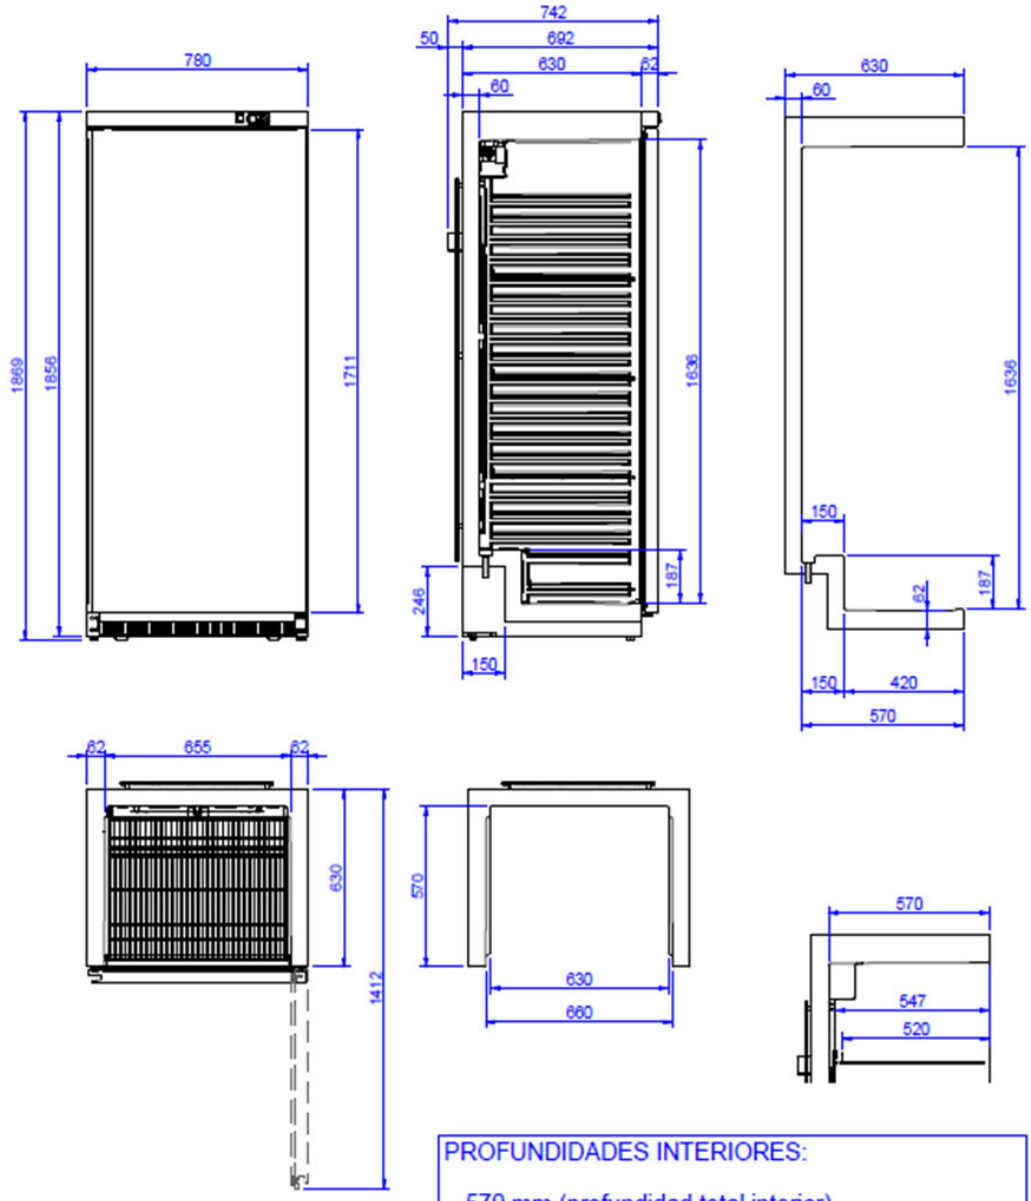

PROFUNDIDADES INTERIORES:

- 570 mm (profundidad total interior)
- 547 mm (profundidad hasta la placa del evaporador)
- 520 mm (profundidad hasta el tope de la parrilla)