Catalogue
FOOD SERVICE
Chapter
DISTRIBUTION

Specific model
FCR6-160-3 230V 1N 50/60Hz

19092114 20/05/2022

DENOMINATION:

Static refrigerated well with 160 mm depth width 610 mm 3 GN 1/1 capacity FCR6-160-3 230V 1N 50/60 Hz climate class IV cold group in cluded refrigerant gas R290

DESCRIPTION :

- Static refrigerated well specially designed to hold, display and serve chilled food (e.g. fruits, desserts, yogurts, cold appetizers, presented on plates/ramekins, etc.) and beverages (bottles, cans) keeping displayed product at optimum temperatures during service time.
- Manufactured in stainless steel with satin finish.
- Static refrigerated well with depth to exhibit pans of different heights
- Well with rounded corners inside to make cleaning operations easier, ensuring maximum hygiene.
- Static well refrigeration system by expanded copper coil located in its base.
- Polyurethane insulation with ecological injection, CFC-free, with high-density (40 kg/m³) allowing energy savings by reducing loss of cold air.
- Control panel with digital thermostat, protected by the structure perimeter, avoiding hindrances in their daily use.
- Control panel with 1-meter long cable, allowing to be installed on another element, e.g, furniture under the drop-in element.
- Electronic thermostat, with digital display, to control and regulate the temperature on the static well at the desired set point.
- Automatic defrost system that minimizes compressor workload and saves energy.
- Stamped drain on the well, to discharge condensation water. A connection from the drain to the sanitation network is recommended.
- Automatic evaporation system of defrost water as a standard option.
- Robust structure with 13 mm thick overlap, once element is dropped-in on the worktop, ensuring cleanness and aesthetics.
- Prepared for installation of a light foodshield, easily mounted on the structure by means of threaded plates.
- Prepared for installation of a digital thermometer facing the public.
- Digital thermostat allows turning on, at the same time, refrigerated element and foodshield with light.
- Operating temperature on the base of the static well: from -10 ºC to +5 ºC.
- Copper coil also on the sides of the well to improve performance.

POSSIBLE ACCESSORIES :

- FOODSHIELD WITH LIGHT
- NEUTRAL FOODSHIELD
- TOOL TO LIFT DROP-IN

DIMENSIONS



X Width	1115 mm	X Gross width	1235 mm
Y Depth	610 mm	Y Gross depth	730 mm
Z Height	632 mm	Z Gross height	832 mm
Net Weight	54,0 kg	Gross Weight	64,0 kg
Net volume	0,430 m3	Gross volume	0,750 m3

ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	0,315 kW
Amperage (A)	1,97A
Voltage	230V - 1N
Electric frequency	50/60Hz

GAS TECHNICAL SPECIFICATIONS

Gas type	R-290

COLD TECHNICAL SPECIFICATIONS

Refrigeration power	0,290 kW
Climate class	4
Cooling gas load	78,000 g

CONNECTIONS TECHNICAL SPECIFICATIONS

Drain 1 diameter	1/2"

SERVICE TROLLEY ACCESSORIES

Cut-out Lenght (mm)	1090
Cut-out Width (mm)	585
Capacity (GN)	3 x GN1/1
Well type	Static refrigerated
Depth well (mm)	160
Bottle Ø 65 mm cap. in well	146
Ramekin Ø 130 mm cap. in well	36
Plate Ø 150mm capac. in well	27

Catalogue
FOOD SERVICE
Chapter
DISTRIBUTION

Specific model
FCR6-160-3 230V 1N 50/60Hz

19092114 20/05/2022



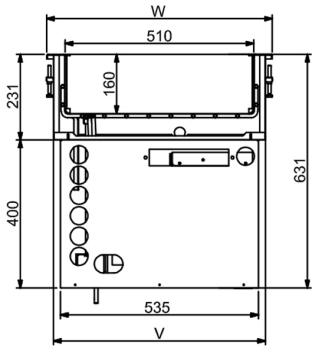

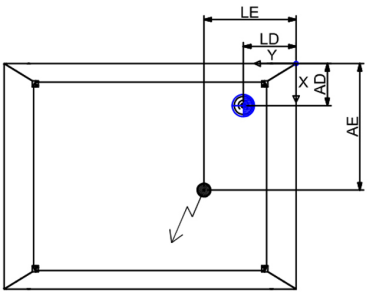

W = 610 mm	W = 720 mm
LE : 241 mm LD : 143 mm AE : 335 mm AD : 114 mm	LE : 241 mm LD : 143 mm AE : 390 mm AD : 169 mm

H : - 538 mm

H : - 288 mm

				W = 610 mm	W = 720 mm
	X	Y	Z	V	V
2GN	790	698	304	573	683
3GN	1115	1023	629	573	683
4GN	1440	1348	954	573	683
5GN	1765	1673	1279	573	683
6GN	2090	1998	1604	573	683