The photo may show the standard model and not the configurated one

Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
CCPB-2G T NS 230V 1N 50Hz

19089609 24/03/2025

DENOMINATION:

Concept gastronorm GN 1/1 700 depth refrigerated counter with 1 drawer 2/3 and 2 drawers 1/3+1/3 without splashback.

DESCRIPTION :

- Interior constructed with AISI-304 stainless steel exterior in food grade stainless steel.
- 50 mm thickness, CFC-free, high-density (40 kg/m³) polyurethane insulation, injected under high pressure.
- Heavy-duty stainless-steel working top with 100mm high splash-back, preventing spillage behind the counter.
- Intuitive, digital display for electronic control with energy saving function to ensure an optimal control of storing products.
- Intended to give support to counter top cooking equipment. Ideal for refrigeration solutions in small rooms.
- Stainless steel doors with ergonomic, full-length, robust, perfectly integrated handle that avoids dust and dirt collection.
- Stainless steel drawers with perforated bottom plates and telescopic sliding guides, capable of complete retraction, to economize working surface. Other drawer configurations are also available upon request.
- Removable pull-out/push-in magnetic door gasket to keep maximum hygiene and maintain the insulating properties
- Hinged doors with automatic return for a perfect closing that minimize temperature gain. Doors have a 120° dwell position and close automatically at less than 90°.
- Pivotable front panel with easy access for service access and ventilation grid design allowing machine to be embedded without pena lizing performance.
- Internally designed forced draft cooling system with low consumption electronic components to guarantee optimal equipment efficiency and performance.
- Optimal air circulation system that guarantees a balanced and constant distribution throughout the equipment, so that the temperature remains uniform. It helps preserve food for longer.
- Height-adjustable stainless steel legs. Height of the legs can be adjusted individually (130 mm - 200 mm) to enable convenient cleaning.
- Automatic evaporation of defrost water.
- Stamped edge interiors, easier cleaning operations to reduce potential dirt traps with a built-in drainage to get rid of waste liquid inside units.
- Removable and height adjustable epoxy coated GN 1/1 grids with a maximum loading capacity of up to 40 kg.
- Equipment with 1 GN 1/1 grids and height adjustable 2 sets of tray slides per each full door.

POSSIBLE OPTIONS :

- 60 Hz
- Stainless Backing
- Wheels Kit (Factory Assembly)
- Door frame resistance

STANDARD OPTIONS :

- Without breastplate
- Drawers [1/3] unit

DIMENSIONS



X Width	1342 mm	X Gross width	1455 mm
Y Depth	700 mm	Y Gross depth	825 mm
Z Height	584 mm	Z Gross height	765 mm
Net Weight	103,0 kg	Gross Weight	107,0 kg
Net volume	0,549 m3	Gross volume	0,918 m3

ELECTRICITY TECHNICAL SPECIFICATIONS

Electric power	0,203 kW
Voltage	230V
Phases	1N
Electric frequency	50Hz
Amperage (A)	0,96 A

COLD TECHNICAL SPECIFICATIONS

Termperature	0 +8 ºC
Climate class	4
Refrigeration power	0,361 kW
Gas type	R-600a
GWP	3
Cooling gas load	0,064 kg
Gross internal volume	177 L
Noise level	54,00 dB
Condensation system	Vent.
Model Type	Counter Cabinet
Annual elec. consumption	956,30 kWh
Power consumption 24h	2,62 kWh
Refrigeration net.vol	63 L
IEE	49
Clasif. Energy efficiency	C

CONNECTIONS TECHNICAL SPECIFICATIONS

Single-phase 230V wiring	2X1+T-2A

Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
CCPB-2G T NS 230V 1N 50Hz

19089609 24/03/2025

The photo may show the standard model and not the configurated one

POSSIBLE ACCESSORIES :

- ACCESSORIES FOR REFRIGERATION
- GASTRONORM GRIDS

Catalogue
FOOD SERVICE
Chapter
REFRIGERATION

Specific model
CCPB-2G T NS 230V 1N 50Hz

19089609 24/03/2025

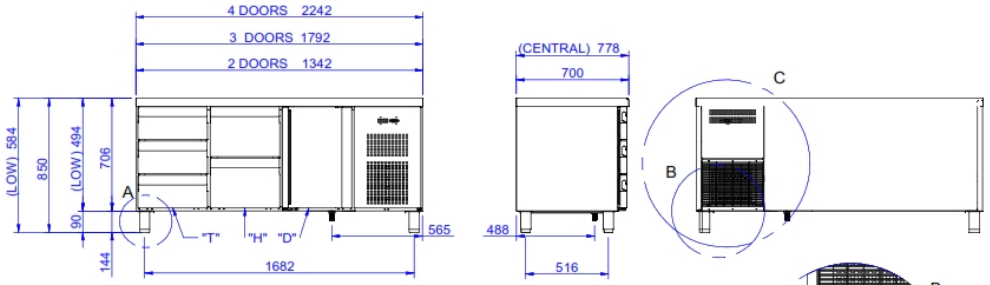



DRAIN



132<X<192
90<X<105 (LOW)



ELECT.



OPTIONS

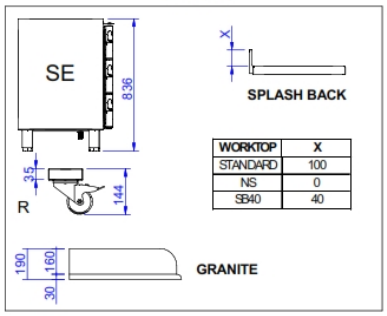

WORKTOP	X
STANDARD	100
NS	0
SB40	40

DRAWER DIMENSIONS

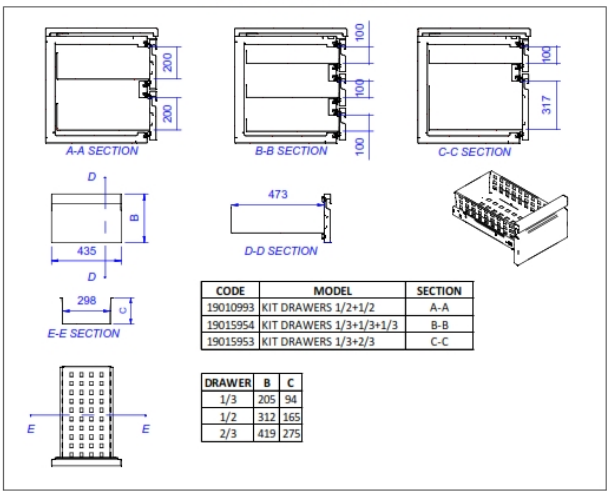

CODE	MODEL	SECTION
19010993	KIT DRAWERS 1/2+1/2	A-A
19015954	KIT DRAWERS 1/3+1/3+1/3	B-B
19015953	KIT DRAWERS 1/3+2/3	C-C

DRAWER	B	C
1/3	205	94
1/2	312	165
2/3	419	275