

MODELS:	VEU9S VEU12S	VEU15S VEU18S	VEU25S VEU31S	VEU37S
---------	-------------------------------	--------------------------------	--------------------------------	---------------

Europa series – Ventilated without storage curved glass.

Strengths

- ✓ **Combination of different cooling system modules: ventilated, half-static and static. Modules with or without cooled storage. Angles and counters to adapt the line to a space.**
- ✓ **Greater precision in temperature control. Easier to adjust the temperature range we want to achieve.**
- ✓ **All condenser units are tested 100%, in helium chambers to refrigerant leak detections.**
- ✓ **LED lighting incorporated, reducing energetic consumption between 80% and 90% respect to a traditional light bulb.**
- ✓ **Infrico is AENOR audited and certified by internationally recognized firm. ISO 9001:2015 (Quality); ISO 14001:2015 (Environmental); OSHAS 18001:2007 (Prevention and Worker Safety). Audited and Certified by INTERTEK for compliance with UL 471 and NSF 7.**



VEU18S

MODEL	Dimensions (mm)			Sides thickness (mm)	Exposure surface (m ²)	Gross volume (L)	Temp. regime (°C)	Ref.	Gas charge (gr.)	Net weight (Kg.)
	Length	Depth	Height							
VEU9S	938	1285	1310	40 + 40	0,86	1580	0°C / +6°C	R452A	350	154
VEU12S	1250	1285	1310	40 + 40	1,14	2100	0°C / +6°C	R452A	400	186
VEU15S	1562	1285	1310	40 + 40	1,43	2630	0°C / +6°C	R452A	450	194
VEU18S	1875	1285	1310	40 + 40	1,72	3160	0°C / +6°C	R452A	550	206
VEU25S	2500	1285	1310	40 + 40	2,29	4210	0°C / +6°C	R452A	650	240
VEU31S*	3125	1285	1310	40 + 40	2,86	5263	0°C / +6°C	R452A	-	240
VEU37S*	3750	1285	1310	40 + 40	3,43	6315	0°C / +6°C	R452A	-	360

*Modelos para conectar a unidad remota

MODELS: VEU9S VEU12S	VEU15S VEU18S	VEU25S VEU31S	VEU37S
---------------------------------------	--------------------------------	--------------------------------	---------------

Europa series – Ventilated without storage curved glass.
STANDARD FEATURES
➤ Modular lines

- Different cooling system modules can be combined using complete dividers.
- Designed for meat and precooked and packaged foods, charcuterie, milk products and sandwiches.

➤ Exterior

- Plastic coated steel exterior.
- AISI 304 stainless steel worktop.
- Galvanised steel exposure surface.
- Lacquered DM decoration.
- Folding secured curved glass.

➤ Interior

- Plastic coated steel interior.
- Enamelled steel base.
- LED lighted shelf and exposure surface.
- Storage door clearance of 425x255 mm.

OPTIONAL

- Stainless steel exposure surface.
- Night curtains.
- Heated glass.

➤ Insulation

- Insulation by free CFC's polyurethane, foam high-pressure injected with density 40 Kg/m³.
- Zero ODP and Low GWP.

➤ Refrigeration

- Temperature and defrost regulated by a digital controller.
- Automatic defrost.
- Ventilated condensation system.
- Forced evaporation system.
- Stainless steel evaporative tray with double vat, one for hot gas and another with electrical heater.
- Climatic class 4 (30°C, 55%RH).

➤ Electrical

- Electrical connection: 230 V / 1 ph / 50 Hz.




- Double plane (without storage).
- Range of decoration colours (consult).
- Electrical connection 230 V / 1 ph / 60 Hz.
- Electrical connection 115 V / 1 ph / 60 Hz.

MODELS	Dimensiones Paletización (mm)			Peso Palet (Kg.)	Potencia (W)	Comp. (HP)	Potencia frigorífica (W a -10°C)	Consumo (kWh/24h)	Inten. (A)	Container 20' / 40' / 40' HC	Trailer
	Largo	Fondo	Alto								
VEU9S	1100	1330	1500	190	755	1/2	817	10,6	3,5	8 / 17 / 17	22
VEU12S	1340	1330	1500	200	1015	5/8	1096	14,2	5,5	4 / 8 / 8	10
VEU15S	1720	1330	1530	215	1070	3/4	1315	15,0	4,5	4 / 8 / 8	10
VEU18S	2020	1330	1530	279	1310	1	1506	18,3	5,5	4 / 8 / 8	10
VEU25S	2650	1340	1500	380	1585	1 + 1/6	2009	22,2	6,1	2 / 4 / 4	5
VEU31S	3275	1340	1500	380	310	-	2600	4,3	1,6	1 / 3 / 3	4
VEU37S	3900	1340	1500	500	310	-	3000	5,2	1,1	1 / 3 / 3	3


MODELS: VEU9S VEU12S VEU15S VEU18S VEU25S VEU31S VEU37S *Europa series – Ventilated without storage curved glass.*

GENERAL VIEW


FRONT VIEW

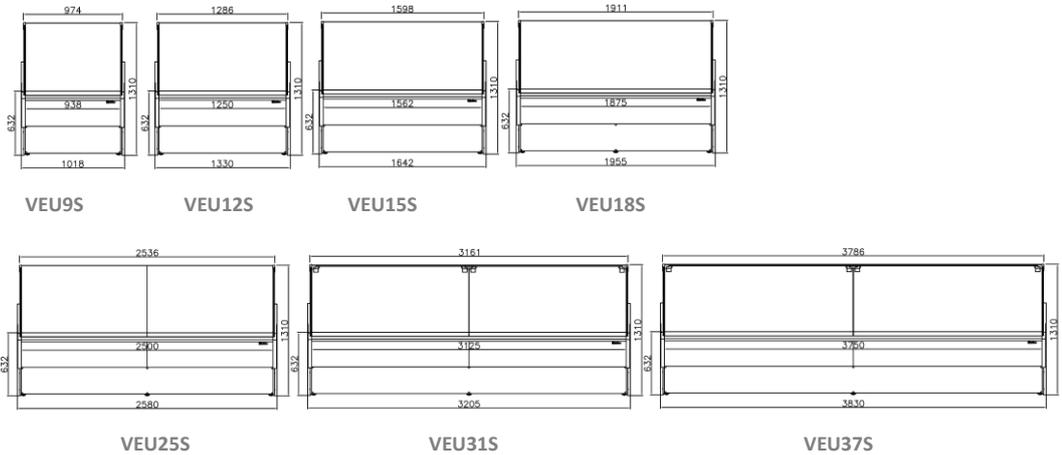


TOP VIEW

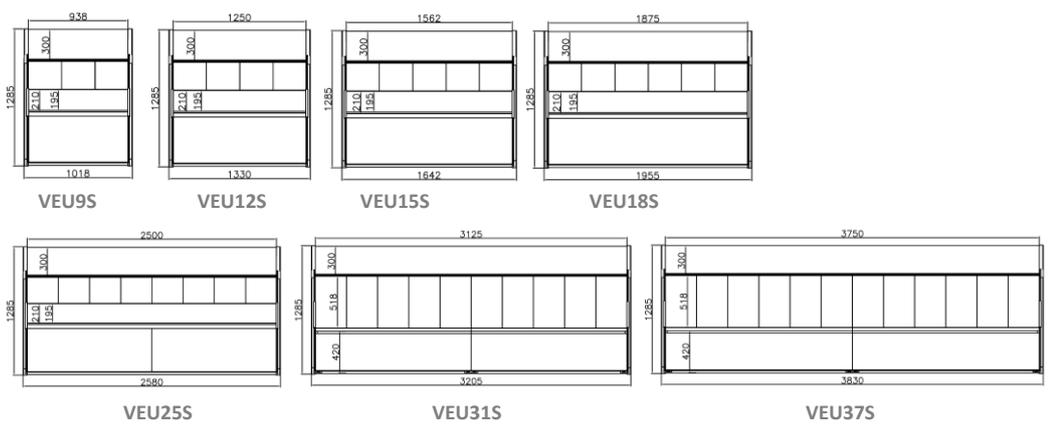

SIDE VIEW

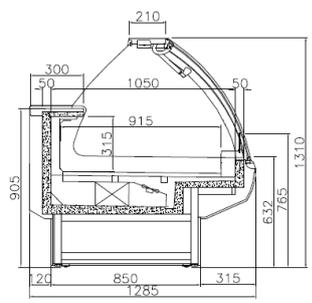

CONNECTIONS

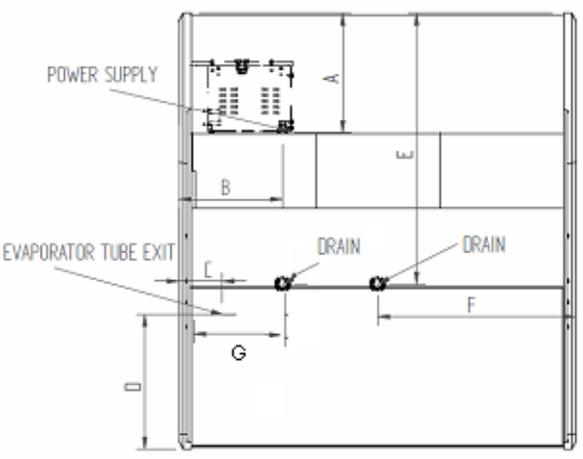

MODELS	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)
VEU9S	303	260	108	341	687	500	-
VEU12S	303	260	108	341	687	625	-
VEU15S	303	260	108	341	687	781	-
VEU18S	303	260	108	341	687	938	-
VEU25S	303	260	108	341	687	1250	-
VEU31S	303	260	108	341	687	150	150
VEU37S	303	260	108	341	687	150	150